

imageRUNNER
2206N | 2006N | 2206

Canon

Delighting You Always

READY FOR BUSINESS.
PRINT FAST, PRINT SAFE.

DESIGNED FOR SMALL
AND MEDIUM BUSINESSES



iR2206N

22PPM. Secure Print. Connectivity.

iR2006N

20PPM. Secure Print. Connectivity.

iR2206

22PPM. Simple. Fast.

Business Can Be Simple



THE imageRUNNER 2206/2006 SERIES

The imageRUNNER 2206/2006 Series comprises of three models, iR2206N and 2006N (standard models) and iR2206 (entry model). imageRUNNER 2206N, 2006N support secure printing and Printer Command Language (PCL), and aim to improve convenience through the Send Lite function. The entry model is robust with basic functions, while the standard models support Wi-Fi and mobile printing by the use of CANON PRINT Business, Mopria, Google Cloud Print and more. These models boast improved durability and reliability in harsh environments, such as under conditions of high air temperature and humidity.



TAKE CONTROL OF YOUR JOB OPERATIONS

- Touch Panel provides ease of use and reduces operational steps
- Customizable Home screen
- Improved screen visibility for Touch Panel with the use of backlight
- Up to 13 languages* supported

*Supports Malay, Thai, Vietnamese & more




COPY ID CARDS EFFORTLESSLY

- One-touch shortcut key makes copying of ID cards onto a single printout simple and efficient.
- Shortcut setup for ID card copy is not required

ENJOY MORE VALUE WITH imageRUNNER 2206N/2006N

WIRELESS LAN

Built-in with Wi-Fi capability, the imageRUNNER 2206N/2006N can connect wirelessly to a network via an access point. All other connected electronic devices on the same network will be able to print wirelessly, thereby providing greater convenience to users.

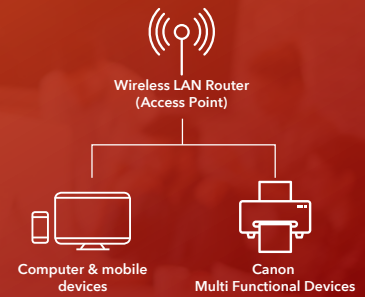

SECURE PRINTING

Protect confidential information from your documents by securing your print job with a configurable PIN.

Documents are held in the printer and released only when a PIN is entered. With the additional layer of verification, this eliminates security risks when printouts are left unattended. It also indirectly reduces paper wastage in the event of a misprint.



SEND LITE

- **Scan to Email:** Scan your original documents through the platen or automatic document feeder (ADF) and send the scanned document as an attachment to multiple email addresses.
- **Scan to SMB:** Scan your original documents through the platen or automatic document feeder (ADF) and store your files in the network folder via SMB protocol.
- **Au-Send:** Send function is available only to authenticated users, deterring various types of potential data leakages.



MOBILE PRINTING

- Supports businesses with mobile printing for a variety of file formats including image files, *PDF, *Microsoft Office files and web pages.
- **Canon PRINT Business:** Free download from App Store (iOS) and Google Play (Android)



SERIES LINE-UP

Model	Copy Speed	Network Print	Scan	Send Lite	WiFi	Dept ID	Platen Cover	DADF	Duplex	Max. Paper Cassette
iR2206N	22ppm	✓	Push / Pull	Send to email/ SMB	✓	✓	Opt	Opt	Opt	2 x 250 sheets (80gsm)
iR2006N	20ppm	✓	Push / Pull	Send to email/ SMB	✓	✓	Opt	Opt	Opt	2 x 250 sheets (80gsm)
iR2206	22ppm	✗	Push / Pull	✗	✗	✗	✓	✗	✗	1 x 250 sheets (80gsm)

SPECIFICATIONS



GENERAL SPECIFICATIONS		iR2206	iR2006N	iR2206N
Type		A3 Monochrome Multifunctional Device (Reader/Printer Desktop)		
Copy/Print Speed	A4	22ppm	20ppm	22ppm
	A3	11ppm	10ppm	11ppm
Warm-Up Time (Time from device power on, until copy ready)		13 secs or less		
Recovery from sleep mode		4.3 secs		
First Copy Time (A4)		7.4 secs		
Memory		256 MB	512 MB	
Dimensions (W x D x H)		622 x 589 x 499	622 x 606 x 600mm (with ADF)	
Weight		Approximately 28.7Kg	Approximately 35.5 kg (with ADF)	
Installation Space (W x D)		920 x 589 mm (when multi purpose tray is extended)		
Power Supply		220 to 240 V AC, 50/60 Hz, 2.4 A	220 to 240 V AC, 50/60 Hz, 2.7 A	
Max Power Consumption	Maximum Power Consumption:	1.5 kWh		
	When the machine is in the Sleep mode:	2 W		
Toner Yield (A4, 6% coverage)		Approx 10,200 sheets (A4, 6% coverage)		
Drum Yield		Approx 66,000 sheets	Approx 63,700 sheets	Approx 66,000 sheets
PRINT SPECIFICATIONS				
Print Resolution		600 x 600 dpi		
Page Description Language(s)		UFRII LT (Standard)	UFRII LT (Standard), PCL6 (Optional)	
Print OS Compatibility		Windows 10/ 8.1/ 7, Windows Server 2008/ 2008 R2/ 2012/ 2012 R2/ 2016, Mac OS X 10.9.5 or later		
Interface	Network	N/A	Ethernet 100Base-Tx/10Base-T (IEEE 802.3 compliant), WLAN IEEE 802.11b/g/n	
	Others (Local Print/Scan)	USB2.0 x 1		
Network Protocol		N/A	TCP/ IP (IPv4/IPv6), USB ;Frame type: Ethernet II, Print applications: LPD/ Raw/ IPP / IPPS/ WSD/ Mopria/ Google Cloud Print/ AirPrint/ Windows10 Mobile Print	
COPY SPECIFICATIONS				
Copy Resolution		600 x 600 dpi		
Multiple Copies/Prints		Up to 999 copies		
Magnification		25% - 400% (1% increment)		
SEND SPECIFICATIONS				
Destination		N/A	Scan to Email (SMTP), network folders (SMB)	
Scan Speed (Simplex, A4, 300 dpi)		N/A	BW: 13 sheets/ minute, CL: 6 sheets/ minute	
Address Book		N/A	LDAP (5)/Local(104) / One-touch(4)	
SEND Resolution		N/A	BW/CL 300 x 300 dpi	
SEND File Format		N/A	PDF/ Compact PDF/ JPEG/ TIFF	
SCAN SPECIFICATIONS				
Destination		MF Scan Utility, application compatible with TWAIN/WIA		
Supported Protocol		TCP/ IP, USB		
Scan Speed (Platen, A4, 600 dpi)		BW: 1.71 secs, CL: 3.42 secs		
Scan Speed (Simplex, A4, 300 dpi)		BW: 23 sheets/ minute, CL: 12 sheets/ minute		
Scan Resolution		BW: 600 x 600 dpi, CL: 300 x 600 dpi		
Scan File Format		TIFF/ JPEG/ PNG/ PDF (Compact, Searchable) / PDF (Divided into Single-Page Files)		
Scan OS Compatibility		Windows 10/ 8.1/ 7, Windows Server2008/ 2008 R2/ 2012/ 2012 R2/ 2016, Mac OS X 10.9.5 or later		
SECURITY				
Authentication		N/A	Department ID management (Max: 100 IDs)	
Network		N/A	Standard: IP/Mac Address Filtering, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP	
Document		N/A	Secure Print	
PAPER HANDLING				
Paper Sizes	Cassette 1	A3, B4, A4R, A4, B5, B5R, A5R, India-LGL, FOOLSCAP		
	Cassette 2	-	A3, B4, A4R, A4, A5, B5, B5R	
Paper Input Capacity (Standard)	Multi Purpose Tray	A3, B4, A4R, A4, B5, B5R, A5, A5R, India-LGL, FOOLSCAP, Envelope (COM 10, Monarch, ISO-C5, DL)		
	Cassette 1	250 sheets (80gsm)		
Paper Input Capacity (Optional)	Multi Purpose Tray	80 sheets (80gsm)		
	Cassette 2*	N/A	250 sheets (80 gsm)	
Paper Specification	Cassette	Weight: 64 - 90gsm , Type: Plain (64 to 90gsm), Recycled (65 to 80gsm), Colour (64 to 80gsm), Pre-punched (75 to 80gsm)		
	Multi Purpose Tray	Weight: 60 - 128gsm; Type: Plain (64 to 90gsm), Heavy 1 (91 to 105gsm), Heavy 2 (106 to 128gsm), Recycled (65 to 80gsm), Colour (64 to 80gsm); Pre-punched (75 to 80gsm), Bond (75 to 90gsm), Transparency, Label, Envelope		
OPTIONAL ACCESSORIES				
DUPLIX AUTOMATIC DOCUMENT FEEDER - AY1*				
Type		N/A	Automatic Document Feeder	
Size of Originals		N/A	A3, B4, A4, A4R, B5, B5R, A5, A5R, FOOLSCAP, India LGL	
Paper Weight		N/A	When scanning continuously: 52 to 105g/m2 When scanning a single original: 37 to 128g/m2	
Max. Number of Originals		N/A	50 sheets (A4, 80gsm)	
Scanning Speed (Simplex)	Copying (A4 in BW at 600 dpi)	N/A	20 ipm	22 ipm
	Scanning (A4 in BW 300 dpi)	N/A	23 ipm	
Dimensions (W x D x H)		N/A	565 x 520.5 x 126 mm	
Weight		N/A	Approximately 7.0 kg	
OTHER OPTIONAL ACCESSORIES AND SUPPLIES				
Duplex Unit-C1*, Platen Cover Type X*, Cassette Feeding Module - AD1*, FL Cassette-BB1*, Heater Kit-M2, Cassette Heater Unit-40, NPG-59 Drum Unit, NPG-59 Black Toner *Available for iR2206N/2006N only.				



SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS
CANON SINGAPORE PTE. LTD.
 1 Fusionopolis Place, #15-10, Galaxis, Singapore 138522
 Tel : 65-6799 8888 | Fax : 65-6799 8882 | www.canon-asia.com

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document. Canon and Business Can Be Simple are trademarks of Canon Inc, and/or its affiliates. Other names may be the trademarks for their respective owners.

