

imageRUNNER
2925i | 2930i | 2935i | 2945i

Canon
Delighting You Always

Swift Functionality for Smoother Workflows

Offering Streamlined Performance



Mobile
Support



Optimal
Security



Monochrome
Printing



USB
Compatible

Business Can Be Simple

imageRUNNER 2900i series

Introducing the new imageRUNNER 2900i series, a range of A3 monochrome multi-functional devices designed for small and medium-sized offices. Inheriting the high-end usability and functionality of the imageRUNNER ADVANCE DX line, the new series streamlines workflow and daily operations by simplifying operations with intuitive features.



Time-saving Accessibility

Combine different steps of day-to-day device operations, ranging from printing to encrypting documents, all into one personalised button. Simply customise multiple commonly used settings on the 7-inch operating panel and execute them with ease, saving time and shortening work processes.

Swift Printing In Your Hands

Mobile printing and scanning is possible with the Canon PRINT Business application. Documents can be previewed and printed on mobile devices on the move by connecting them to your device via the QR code feature, improving printing accessibility in the workplace.


Template for Quick Printing

Printing templates can be set up with the Remote UI and customised into a button on the touch panel. Users can just click on the button to print commonly used templates without the need to access a PC.




Small Print & Storage Support

Documents can be stored on and printed from USB media storage without the need for a computer. Information on USB storage can be previewed on the multi-function device, preventing any accidental printouts of unwanted documents by users.

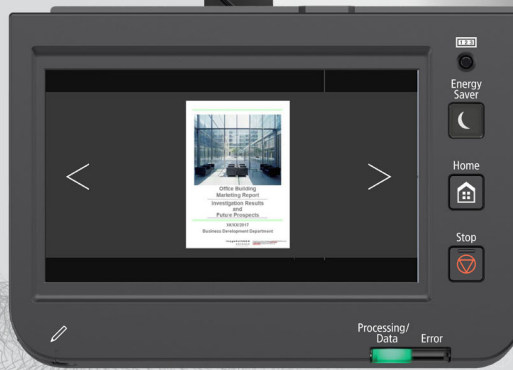

Trusted Data Security

Enhanced device security protects important documents and data, providing business with secured and safe experience.



uniFLOW Online/Online Express

uniFLOW Online/Online Express prevents unauthorised users from using the machine through authentication, increasing document security.

Prevention Measures

Prevent execution of unauthorised applications through intelligent whitelisting. The multi-functional device allows only an approved list of applications to be activated, ensuring protection against malware and threats.



SPECIFICATIONS

MAIN UNIT	
Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Control Panel	7 inch TFT LCD WVGA Colour Touch panel
Memory	Standard: 2.0GB RAM
Storage	Standard: 64GB eMMC (available space 30GB) Optional: 256GB SSD
Interface Connection	Network Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11b/g/n) Others Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets (100 sheets Multi-purpose tray, 2 x 550 sheets paper cassette) Maximum: 2,300 sheets (with Cassette Feeding Unit-AW1)
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 645 sheets (with Inner Finisher-L1 and Copy Tray-T2)
Supported media types	Multi-purpose tray: Thin, Plain, Heavy, Recycled, Coated*, Colour, Tracing, Bond, Transparency, Labels, Pre-punched, Letterhead, Envelope, Postcard *SRA3 is unsupported for Coated (257 to 300 gsm) Upper/Lower Cassette: Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Letterhead, Envelope*, Postcard *Envelope Feeder Attachment Kit A/B (standard) is required.
Supported media sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Free size: 100.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM10 No.10, Monarch, ISO-C5, DL Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes*: COM10 No.10, Monarch, DL *Envelope Attachment A (standard) is required.
Supported media weights	Multi-purpose tray: 52 to 300 gsm* *SRA3 is unsupported for Coated (257 to 300 gsm). *Paper weight supported with Media Adjustment Kit-A1: 60-300gsm. Upper/Lower Cassette: 52 to 256 gsm Duplex: 52 to 220 gsm
Warm-up Time (Quick start mode: ON)	4 Seconds or Less* *Time from device power on to when copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 seconds or less From Power On: 10 seconds or less* *Time from device power-on, until copy ready (not print reservation)
Dimensions (W x D x H)	With DADF-BA1 (iR2945i/2935i): 565 x 687 x 891 mm With DADF-AZ2 (iR2930i/2925i): 565 x 693 x 852 mm
Installation Space (W x D)	Fully Configured: iR2945i/2935i: 1,286 x 1,116 mm (with DADF-BA1 + Inner Finisher tray max extended + Copy Tray-T2 max extended + paper cassette opened) iR2930i/2925i: 1,286 x 1,122 mm (with DADF-AZ2 + Inner Finisher tray max extended + Copy Tray-T2 max extended + paper cassette opened)
Weight	With DADF-BA1 (iR2945i/2935i) Approx. 67 kg With DADF-AZ2 (iR2930i/2925i): Approx. 66 kg
PRINT SPECIFICATIONS	
Print Speed (BW)	iR2945i: 1-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 32 ppm (A4R) iR2935i: 1-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 23 ppm (A4R) iR2930i: 1-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 20 ppm (A4R) iR2925i: 1-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 20 ppm (A4R)
Print Resolution (dpi)	600 x 600, 1,200 x 1,200 (half-speed)
Page description languages	Standard: UFR II, PCL6 Option: Adobe PostScript 3
Direct Print (RUI)	PDF, EPS, TIFF/JPEG, XPS
Printing from mobile and cloud applications	AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* *Optional PCL International Font Set-A1 is required. *Optional Barcode Printing Kit-D1 is required.
Operating System	UFR II: Windows® 10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, macOS (10.13 or later) PCL: Windows® 10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022 PS: Windows® 10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, macOS (10.13 or later) PPD: Windows® 10/11, macOS (10.13 or later)
COPY SPECIFICATIONS	
Copy Speed (BW/CL)	iR2945i: 1-sided: Up to 45 ppm (A4), Up to 22 ppm (A3), Up to 32 ppm (A4R) iR2935i: 1-sided: Up to 35 ppm (A4), Up to 17 ppm (A3), Up to 23 ppm (A4R) iR2930i: 1-sided: Up to 30 ppm (A4), Up to 15 ppm (A3), Up to 20 ppm (A4R) iR2925i: 1-sided: Up to 25 ppm (A4), Up to 15 ppm (A3), Up to 20 ppm (A4R)
First-Copy-Out Time (A4)	iR2945i: 5.3 seconds iR2935i: 6.4 seconds iR2930i/iR2925i: 7.0 seconds

Copy resolution (dpi)	600 x 600
Multiple Copies	Up to 9,999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable zoom: 25% to 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 61%, 70%, 81%, 86%, 100%(1:1), 115%, 122%, 141%, 200%, 400%
SCAN SPECIFICATIONS	
Document Feeder Paper Capacity (80 gsm)	DADF-BA1 (iR2945i/2935i): up to 100 sheets DADF-AZ2 (iR2930i/2925i): up to 50 sheets
Acceptable originals and weights	Platen: Sheet, Book and 3-Dimensional objects Document Feeder media weight: DADF-BA1 (iR2945i/2935i): 1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL) DADF-AZ2 (iR2930i/2925i): 1-sided scanning: 38 to 128 gsm 2-sided scanning: 52 to 128 gsm
Supported media sizes	Platen: max. scanning size: 297.0 x 431.8 mm DADF-BA1 (iR2945i/2935i): A3, A4, A4R, A5, A5R, B4, B5, B5R, B6 Custom size: 139.7 x 128.0 mm to 297.0 x 431.8 mm DADF-AZ2 (iR2930i/2925i): A3, A4, A4R, A5, A5R, B4, B5, B5R Custom size: 148.0 x 128.0 mm to 297.0 x 431.8 mm
Scan Speed (ipm: BW/CL; A4)	DADF-BA1 (iR2945i/2935i): 1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/- (600 x 600 dpi, copy) 2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/- (600 x 600 dpi, copy) DADF-AZ2 (iR2930i/2925i): 1-sided Scanning: 35/25 (300 x 300 dpi, send), 25/- (600 x 600 dpi, copy) 2-sided Scanning: 12/8 (300 x 300 dpi, send), 8/- (600 x 600 dpi, copy)
Scan Resolution (dpi)	Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
Full Scan Specifications	Colour Network ScanGear 2. For both TWAIN and WIA
Supported OS	Supported OS: Windows® 10/11/Server2012/Server2012 R2/Server 2016/Server 2019/Server 2022
SEND SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV Optional: Super G3 FAX
Address Book	LDAP (2,000)/ Local (1,600) /One-touch (200)
Send resolution (dpi)	Push: (CL) up to 300 x 300 / (BW) up to 600 x 600 Pull: (CL) up to 300 x 300 / (BW) up to 600 x 600
Communication protocol	FTP, (TCP/IP), SMB3.11 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)
File Format	Standard: TIFF (MMR), JPEG, PDF (Compact, OCR (Text Searchable), Optimise PDF for Web, Format to PDF/A-1b, Encrypt), XPS (Compact, OCR (Text Searchable)), PDF/XPS (Device Signature), Office Open XML (PowerPoint, Word) Option: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single-Page only.
FAX SPECIFICATIONS	
Maximum Number of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	200 x 100dpi (Standard), 200 x 200dpi (Fine) 200 x 400 dpi (Super Fine), 400 x 400 dpi (Ultra Fine)
Sending/Recording Size	Sending: A3, A4, A4R, A5 ¹ , A5R ¹ , B4, B5 ² , B5R ¹ Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R ¹ Sent as A4 ² Sent as B4 short
Fax Memory	Up to 30,000 pages (2,000 jobs)
Speed Dials	Max. 200
Group dials/destinations	Max. 199 dials
Sequential broadcast	Max. 256 addresses
Memory backup	Yes
ENVIRONMENTAL SPECIFICATIONS	
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
Power Source	220-240V 50/60Hz 4A
Power Consumption	Maximum: Approx. 1,500W Sleep Mode: Approx. Wired LAN: 0.8W* * 0.8W is not available in all circumstances due to certain settings.
CONSUMABLES	
Toner (Estimated Yield @ 6% Coverage)	NPG-90 Toner BK: 33,000 pages
OTHER ACCESSORIES AND SUPPLIES	
Cassette Feeding Unit-AW1, Inner 2Way Tray-M1, Copy Tray-T2, Inner Finisher-L1, Inner 2/3 Hole Puncher-D1, Inner 2/4 Hole Puncher-D1, IC Card Reader Attachment-B4, Option Attachment Kit For Reader-A2, Utility Tray-B1, Media Adjustment Kit-A1, PS Printer Kit-BT1E, PCL International Font Set-A1E, Barcode Printing Kit-D1E, Universal Send Trace & Smooth PDF Kit-A1E, Universal Send Digital User Signature Kit-C1E, Super G3 Fax Board-BN1, Remote Fax Kit-A1, Optional Data Storage Kit-A1, Copy Control Interface Kit-D1, ADF Access Handle-A1, Staple-P1	

Canon
Delighting You Always

SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS

CANON SINGAPORE PTE. LTD.

1 Fusionpolis Place #14-10 Galaxis, Singapore 138522

Tel: 65-6799-8888 | Fax: 65-6799-8882 | <https://asia.canon>

DEALER'S STAMP

0856-20-8000-5

e-mail: canon@canondistributor.com
web: <https://canondistributor.com>

This document is for general information only and contents are subject to change without notice. Errors and omissions excepted. Weights and dimensions are approximates. Options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations in connection with this document. Trademarks belong to their respective owners.

© 2023 Canon Singapore Pte. Ltd. All rights reserved. Printed in Singapore.